


ROHS

REV.	ECR	REVISION RECORD	ECN NO.	DRAW	DATE
A		NEW		VINEE	19/08/8

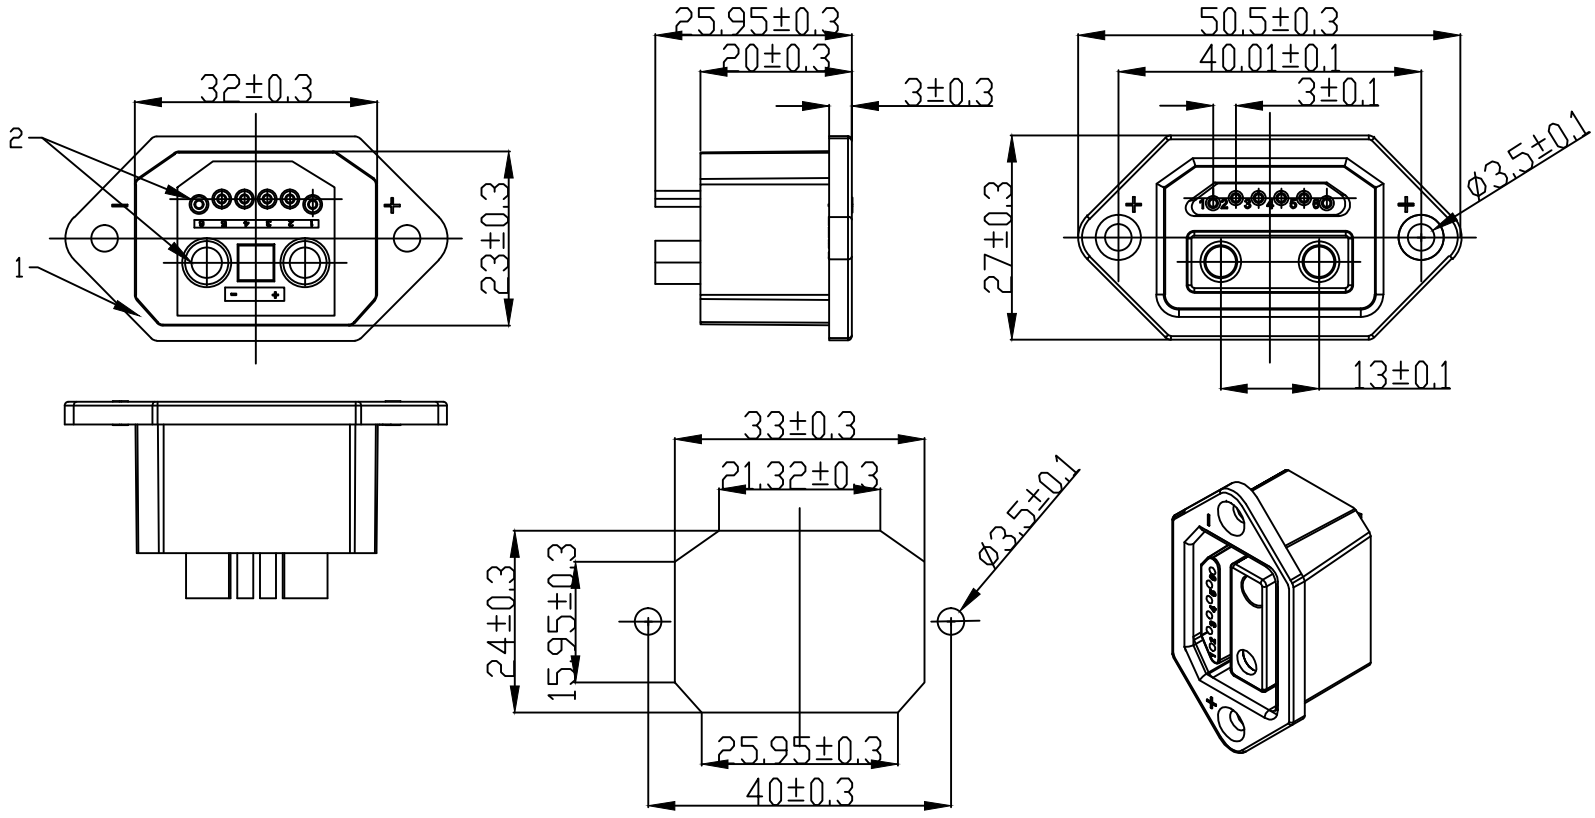

2	2+6	-	POWER/SIGNAL CONTACT
1	1	-	PLASTIC BODY HSL

- MATERIAL:
 - BODY: THERMOPLASTIC, UL94V-0.
 - CONTACT: COPPER ALLOY.
- SPECIFICATIONS:
 - 2.1 RATED CURRENT: POWER 30 AMP, SIGNAL 5AMP.
 - 2.2 RATED VOLTAGE: 500V DC.
 - 2.3 OPERATING TEMPERATURE: -20 °C~+85 ° C.
 - 2.4 RoHS COMPLIANT.
- ALL MATERIALS SHALL BE CERTIFIED COMPLIANT TO THE LATEST RoHS DIRECTIVE.

UNITS: mm		SCALE: 1:1		SHEET NO. 1 of 1		Shenzhen Xime Connector Technology Co., Ltd			
GENERAL TOLERANCES (UNLESS SPECIFIED)	X.XXX± 0.1	REV: A0		DRAWN BY Vinee		DATE 18/05/29		ESS CONNECTOR SOCKET 30A HSL	
	X.XX± 0.2	CHECKED BY /		DATE /					
	X.X± 0.3	APPROVED BY Ben		DATE 19/05/29					
	ANGULAR± 3°	PART NO. PF02006-HSL		DOCUMENT NO. XM-WI-RD002		SIZE A4			

These drawing and specification are the property of Shenzhen Xime Connector Technology Co., Ltd. And shall not be reproduced copied or used in any manner without the prior written Consent of ours. Company website: www.ximeconn.com